

PETP

波纹管边缘保护

Conduit edge protection


+120°C +248°F
-40°C -40°F

Material: TPE




- 弹性波纹管边缘保护套, 适配FIPLOCK®标准波纹管细波形和粗波形
- 保护线缆线束震动时在管子出口处不被磨损
- elastic conduit edge protection for FIPLOCK® corrugated conduits in fine and coarse profile
- to protect sensitive cable and wire insulation at the conduit exit under vibrations

温度范围 / Temperature range
弯曲性能 / 柔性 / Flexibility/Ductility
动态性能 / Dynamic
机械防护性能 / Mechanical protection
防火性能 / Fire precaution performance
耐化学品性能 / Chemical resistance
耐候性 / Resistance to weathering



产品号 Part No. ¹⁾	名义尺寸 Nominal width	尺寸 Dimensions in mm							重量 Weight
		Ø A	B	C	Ø D	Ø E	Ø F	T	
黑色 / black	NW								
PETP-07B	07	13,2	20,4	9,7	9,9	9,2	6,0	1,0	0,8
PETP-10B	10	15,9	22,2	10,7	12,6	11,9	9,3	1,0	1,1
PETP-12B	12	18,9	25,3	12,2	15,5	14,8	11,7	1,0	1,6
PETP-17B	17	24,2	28,1	13,4	20,8	20,0	15,7	1,0	2,5
PETP-23B	23	31,6	30,9	14,7	28,1	27,0	22,0	1,0	3,7
PETP-29B	29	38,1	31,2	14,7	34,2	33,1	27,8	1,2	5,5
PETP-36B	36	45,8	37,2	17,7	41,8	40,6	35,2	1,2	8,1
PETP-48B	48	57,8	37,5	17,7	53,8	52,7	46,0	1,2	10,6
PETP-56B	56	71,5	44,5	20,9	66,2	64,6	55,3	1,5	19,3
PETP-70B	70	83,8	47,4	22,2	78,5	77,0	66,1	1,5	24,4

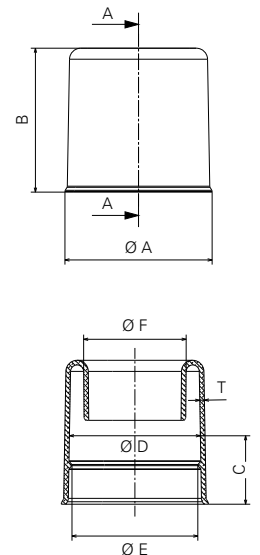

Weitere technische Informationen finden Sie hier / You can find more technical information here

CADENAS – eCATALOGsolutions elektronischer CAD Katalog / eCATALOGsolutions electronic CAD catalog: <https://fraenkische-ip.partcommunity.com>

¹⁾ Nummernschlüssel für FIPLOCK® Zubehörteile / Part numbering key for FIPLOCK® accessories: www.fraenkische-ip.com/fiplock-accsy-part-no



PETP 产品性能 / Product performances

应用性能 <i>Application performances</i>	特性 <i>Characteristics</i>	单位 <i>Unit</i>	规范标准 <i>Standards, specifications</i>	备注 <i>Remark</i>
温度范围 / <i>Temperature range</i>	-40 到 / <i>to</i> +120 -40 到 / <i>to</i> +248	°C °F	IEC EN 61386	
防火性能 / <i>Fire safety performances</i>				
不含卤素和镉 / <i>Free from halogens and cadmium</i>	是 / <i>yes</i>			
阻燃等级 / <i>Fire classification</i>	HB		UL 94	
耐候性 / <i>Weathering performances</i>				
UV- 及耐候性能 <i>UV and weathering performance</i>	好 <i>average to good</i>		IS FIP	5 到 10 年 <i>5 to 10 years</i>

测试条件参照EN ISO 139 , 温度 23°C / 湿度50% r. h. (如未注明测试条件). IS FIP = FIP内部测试规范
Tests carried out acc. EN ISO 139 at 23°C / 50% r. h. (if not indicated differently). IS FIP = Internal Specification FIP

我们尽我们的知识水平所提供的数据, 图片和技术规格图档反映了当前的工程技术水平。这不包含对最后应用有关的任何责任。产品用户需根据应用要求自行进行评估。以确定产品是否符合特殊应用条件。我们对产品的责任只考虑一般规定条件下的水平。FIP保留对产品数据和数值进行技术调整的权利。例如更改材料和加工工艺, 在保证产品性能数值不下降的情况下不会另行通知。

The provided data, images and technical specification drawings reflect the current engineering level and are to the best of our knowledge. This does not include any liability regarding the final application. Users of the products have to make their own evaluation to determine the suitability for a specific application. Our liability for these products considers the stated level within our General Conditions only. FRAENKISCHE Industrial Pipes (FIP) reserves the right to adjust specified data and values as well as implementing technical adjustments of the products e. g. change of materials and processing technologies without prior notice as long as the specified values are not reduced.